



York Regional Forest Trails Accessibility

Ian Buchanan
Manager Natural Heritage & Forestry Services
August 4th, 2009



Accessibility of York Regional Forest Trails

– follow up to Feb 2009 YRAAC feedback

RECAP


2 Step process:

- ❑ Apply Universal Trail Assessment Protocol (UTAP)
- ❑ Consideration of a fully accessible trail
 - built environment standard (June 09 draft)

Current Initiatives


- ❑ Universal Trail Assessment Protocol (UTAP) – Hollidge Tract Pilot – trail assessment complete
 - Assessment based on trail characteristics (grade, cross slope, width, surface, trail length)
 - Partnership between York Region and Oak Ridges Trail Association



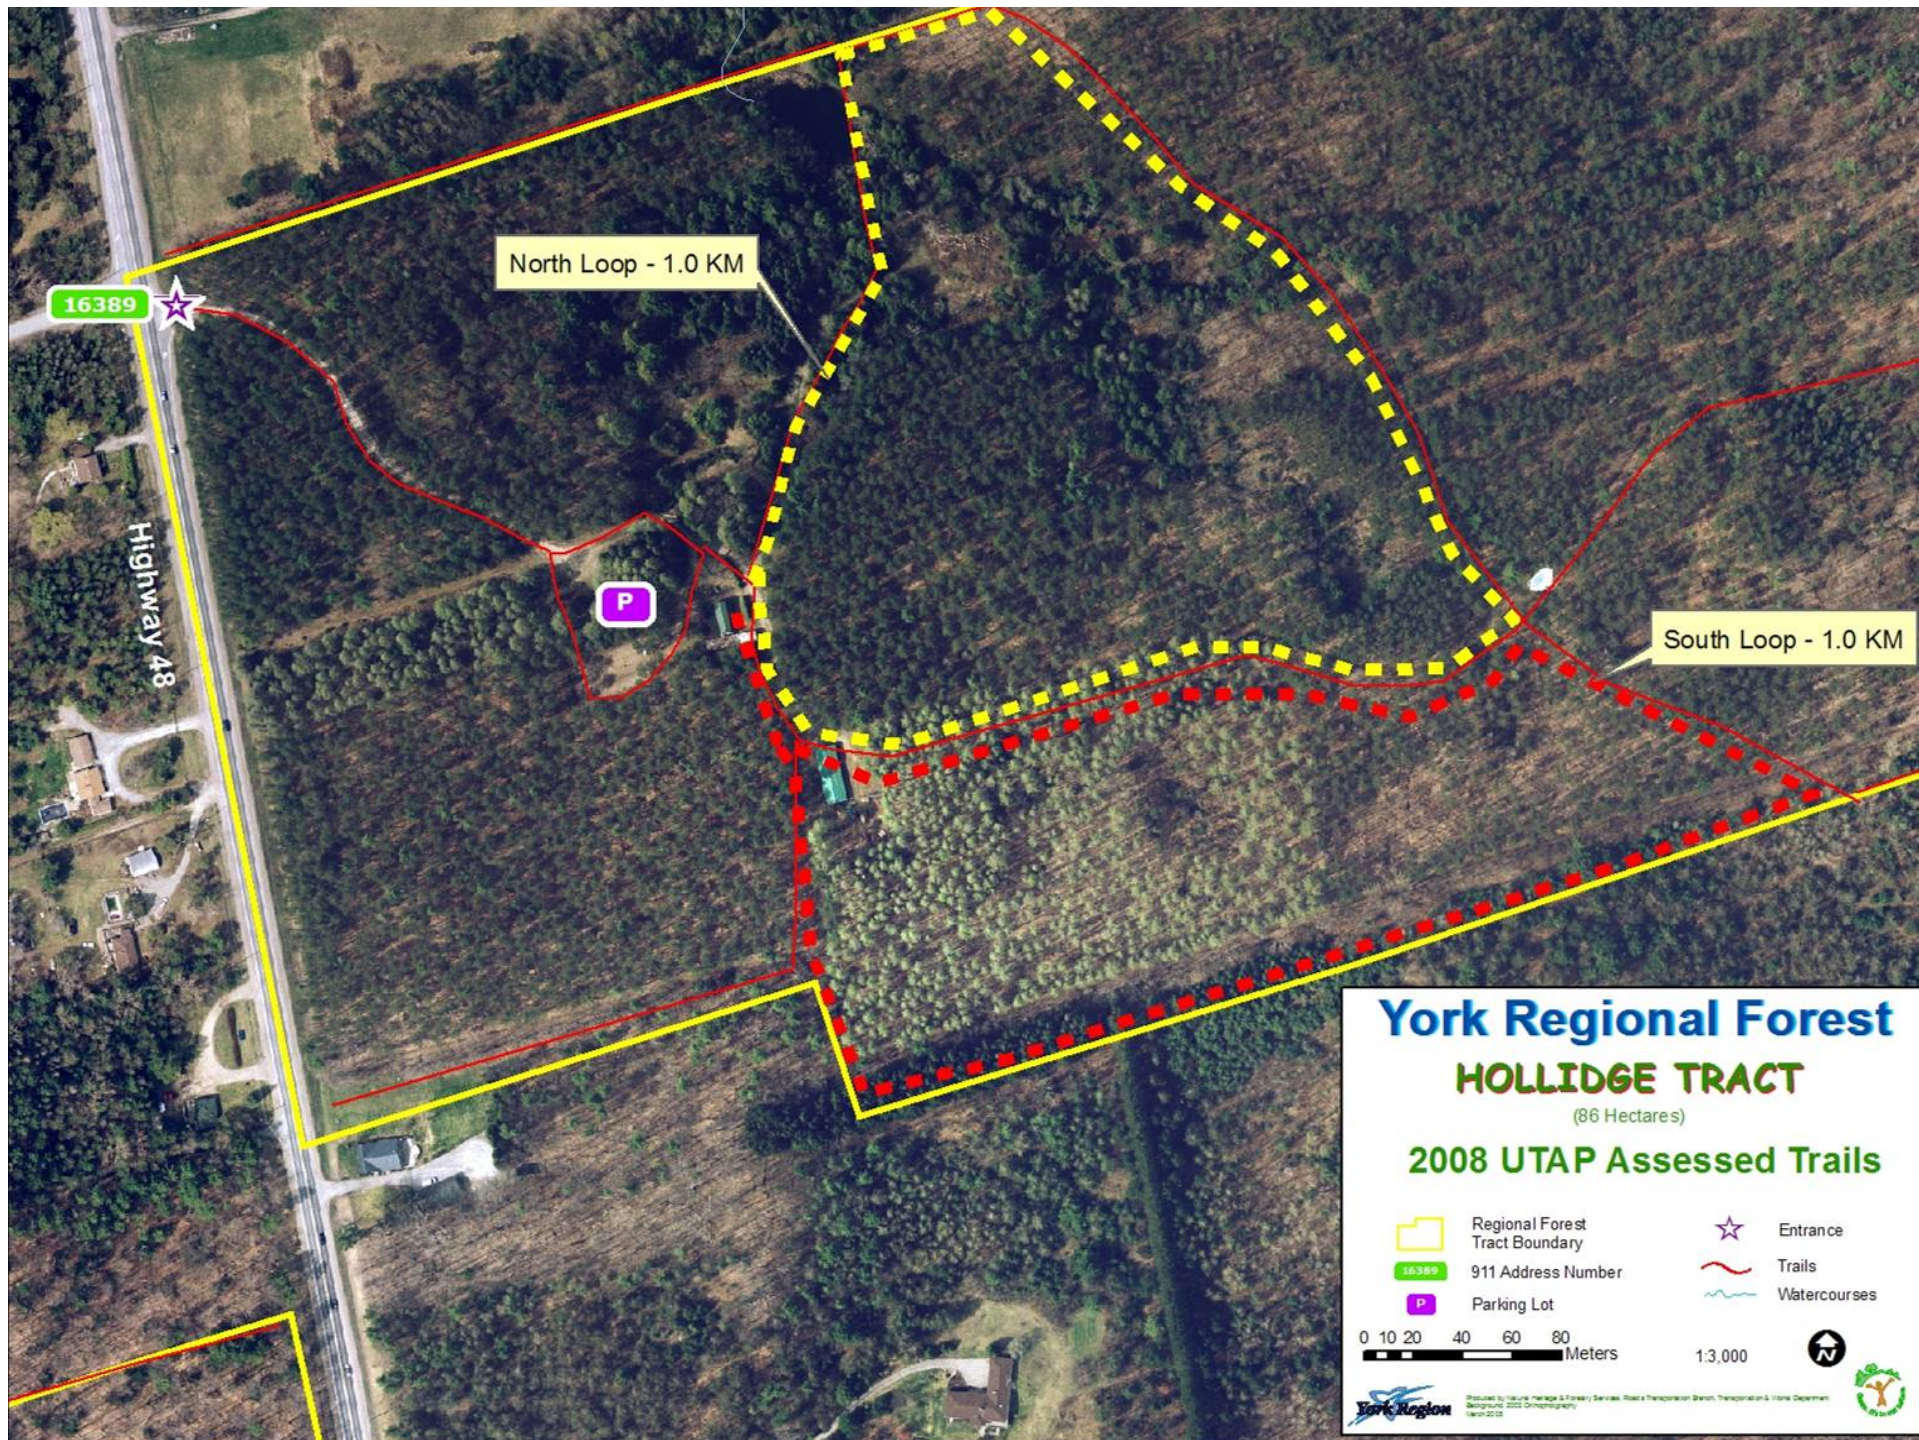



**ACCESSIBLE
TRAIL
PARKING**

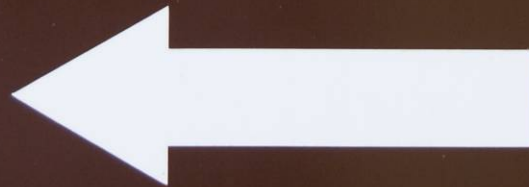



Slide 6

Trail Uses



Hiking

Woodland Passage Trail

Seneca College - King Campus

Trail Length 0.3 mi (0.5 Km)

Linear trail

Cumulative Elevation Change Gain 45 ft (14 m)



Typical Grade is 3.4%

60% of the trail is between 3% and 8%
932 ft (284 m) is between 3% and 8%
8% grade is a standard ramp.



Typical Grade Slope is 2.1%

51% of the trail is between 2% and 5%
794 ft (242 m) is between 2% and 5%



Typical Tread Width is 122 in (310 cm)

Tread Width ranges from 87 in (220 cm) to 138 in (350 cm)



Trail Surface is Aggregate/Gravel

100% of the trail is Firm or better
1555 ft (474 m) of the trail is Firm or better

Trail head Location

- 1) Parking lot on road to Eaton Hall
- 2) Eaton Hall



**Trail
Access
Information**

Warning : Trail conditions may have changed since this trail was assessed. Temporary obstructions (e.g. fallen trees or land slides) may not have been mapped. Maximum grades and cross slopes may vary.
This report is generated by TrailWare which has been created by Beneficial Designs, Inc.

Seneca



Woodland Passage Trail

Seneca College - King Campus

Trail Length 0.3 mi (0.5 Km)

Linear trail

Cumulative Elevation Change Gain 45 ft (14 m)



Typical Grade is 3.4%

60% of the trail is between 3% and 8%

932 ft (284 m) is between 3% and 8%

8% grade is a standard ramp.



Typical Grade Slope is 2.1%

51% of the trail is between 2% and 5%

794 ft (242 m) is between 2% and 5%



Typical Tread Width is 122 in (310 cm)

Tread Width ranges from 87 in (220 cm) to 138 in (350 cm)



Trail Surface is Aggregate/Gravel

100% of the trail is Firm or better

1555 ft (474 m) of the trail is Firm or better

Trail head Location

- 1) Parking lot on road to Eaton Hall
- 2) Eaton Hall



Status review

- ❑ Trail in Hollidge Tract UTAP assessed in 2008
- ❑ Input from YRAAC – fully accessible trail
- ❑ Input from Working Group 2009
- ❑ Assess against Accessible Built Environmental Standard
- ❑ Review parking accessibility options
- ❑ Develop cost estimate/options – Committee update(s)
- ❑ Installation target - Spring 2010
- ❑ Market trail and monitor use